


# HPX-916 VIDEO TRANSMITTER

# 900 MHz

This is an excellent high power video transmitter with tested RF power of 250 mW. This transmitter will transmit over 3000 ft LOS.

## **FEATURES:**

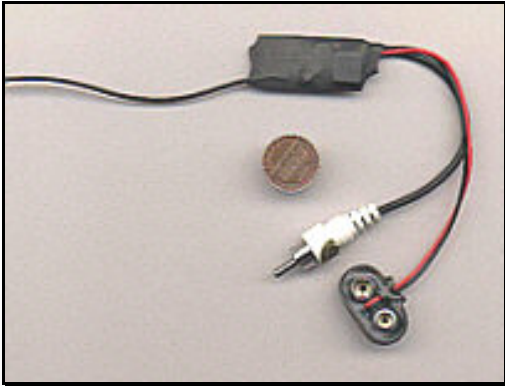

- 916.6 MHz
- Built-in antenna
- 12 V battery operated
- RCA video input
- Excellent picture quality
- Long range
- Recommended receiver DCV-900
- Perfect for covert operations

Technical Specifications	SPX-916
Operating Frequencies:	906 MHz, 915 MHz, 916 MHz
Channel:	# 1, 2, 3
DC Voltage:	12 V – 14.4 V
RF power:	250 mW
Minimum required voltage:	10 V
Battery power:	12 V
Video distortion:	5%
Maximum range:	3000 ft los
Video Format:	PAL, NTSC
Current Consumption:	128 mA
Antenna:	Built-in, matched
Antenna Connector:	N/A
Video Connector:	RCA MALE
Video Impedance:	75 ohms
Video level:	1 V
Temperature Range:	-20 +75° C
Dimensions:	1.25" X 0.6 " X 0.25"
Weight:	14 grams
Modulation:	Negative AM



[www.rf-video.com](http://www.rf-video.com),

Email to: [info@rf-video.com](mailto:info@rf-video.com).

Copyright. © 2002-2012