


LOG2/GR 1.75-1.85 GHz High Performance LAN YAGI Antenna 18 dBi

- General. The LOG/2GR Directional Antenna is designed for short distance FM Radio & TV microwave links purposes in 1.75 1.8 5 GHz frequency ranges. The antenna is made with non-corrosive aluminum alloy and composed of 27 elements, one polyester radome and a mounting bracket.
- Horizontal or Vertical polarization is possible with the standard mounting brackets.
- Water, icing and moisture protection. The internal elements are protected against water, icing and moisture ingress by a sealed polyester radome.
- Instant installation. The reduced overall dimensions and the low weight permit an easy installation even on light poles.
- Lightning resistance is guaranteed by the DC ground potential of the entire antenna.



| Electrical and Mechanical Specifications | |
|--|--------------------------------------|
| Frequency | 1750-1850 MHz |
| Gain | 18 dBi |
| -3 dBi Beam Width | 24 - 32 degrees |
| Impedance | 50 Ohm |
| Max. Input Power | 300 Watts |
| Lightning Protection | DC Short |
| VSWR | < 1.12:1 avg. |
| Weight | 8 lbs. (4 kg) |
| Dimensions | 1150 x 100 (mm) |
| Polarization | Vertical and Horizontal |
| Radome Material | Polyester |
| Operating Temperature | -40° C to to 85° C(-40° F to 185° F) |
| Polarization | Vertical and Horizontal |
| Connector | N type |

RF Antenna Gain Patterns

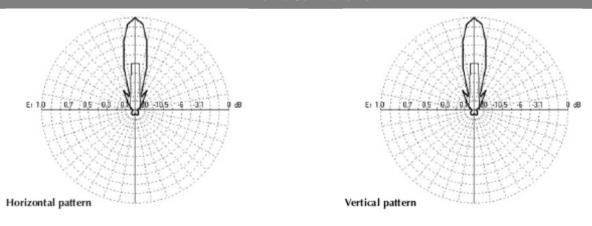

VSWR LOG2/GR 2.0 1.9 1.8 -1.7 1.6 VSWR 1.5 1.4 1.3 1.2 -1.1 1740 1750 1780 1730 1760 1770 1790 1800 1810

Frequency (1730.0 - 1810.0 MHz)